

BATKO

STRONG AND RELIABLE



WWW.BATKO.COM


FB-1301



A discreet low-cost triangular corner housing for small rooms

This very compact, triangular board camera housing is easy to install in any corner, against the ceiling. It comes with an adjustable camera bracket with supplied mounting hardware.

EXTERNAL DIMENSIONS		
WIDTH	HEIGHT	DEPTH
8.00"/203mm	6.00"/152mm	10.60"/269mm

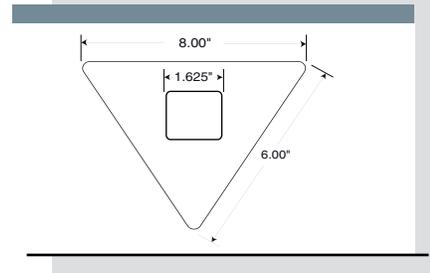


FB-1303



Get the full coverage with this 45° corner enclosure

Its unique angled faceplate allows underneath surveillance of most small rooms such as detention cells, elevators, etc. Once the FB-1303 is installed in the corner and against the ceiling, it becomes almost invulnerable. Cable entry knockouts are provided on each surface for convenient installation. The internal camera bracket can be adjusted 3 different ways ; Tilt, up and down and closer to the window.

EXTERNAL DIMENSIONS		
WIDTH	HEIGHT	DEPTH
9.25"/235mm	7.25"/184mm	4.75"/121mm

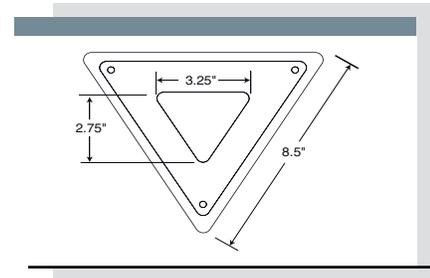


FB-3404



Small indoor/outdoor board camera housing

This housing is designed to withstand severe environmental conditions. The neoprene back plate prevents water and dust infiltration. The cover is fully removable. A universal camera bracket offers flexibility for camera installation and adjustment in various directions. Mounting hardware is included. One internal liquid tight compression connector provides secure cable passing. Corner adapter available (FS-3404)

EXTERNAL DIMENSIONS		
WIDTH	HEIGHT	DEPTH
3.50"/89mm	4.50"/114mm	2.60"/66mm

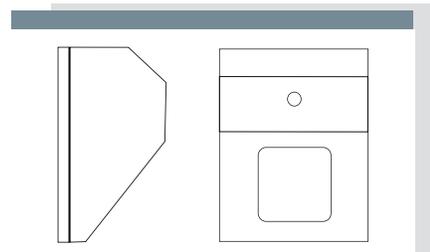

INDOOR ENCLOSURES


FB-13P1



Housing designed for wall to wall coverage

Lightweight, tamperproof, this corner housing is all aluminium. Its cover is fully removable for complete camera access. The camera mounting bracket is hinged and adjustable 0-45° to allow video surveillance underneath the enclosure. The window is 3/16" polycarbonate. Features 4 screws for fast and easy installation on any surface.

EXTERNAL DIMENSIONS		
WIDTH	HEIGHT	DEPTH
7.00"/178mm	11.25"/286mm	10.50"/267mm

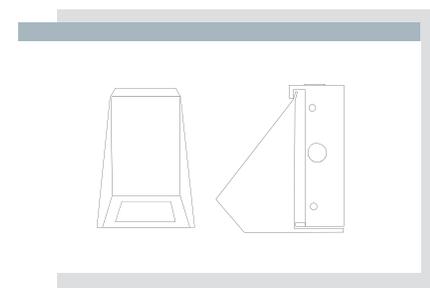


OUTDOOR ENCLOSURES

FB-2008-IP

A proven, insulated hermetically sealed housing

This design has been tested since 1987 in severe Canadian subzero outdoor conditions. This rustproof, tamperproof, weatherproof has all-aluminium construction and mineral fiber insulation and does not need a heater (nor a blower) to keep the camera in good working order. Lightweight, even if it's double-walled, this sealed housing includes a liquid-tight connector to run the cable. The front cover opens and extends horizontally for total camera access. It features a 3/16" polycarbonate window. It can be installed on anywhere with the appropriate mounting bracket; FSM-2012 for wall, FSP-2012 for ceiling, FSC-2012 for corner and FSA-2012 for pole.

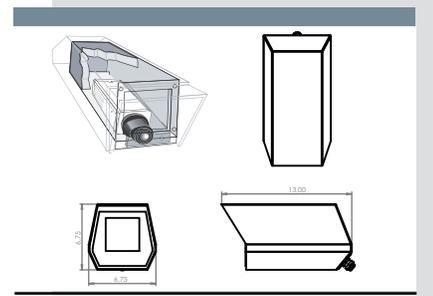


DIMENSIONS EXTERNES		
WIDTH	HEIGHT	DEPTH
6.76"/171mm	6.75"/171mm	13.00"/330mm

FB-2012

A proven, insulated hermetically sealed housing

This design has been tested since 1987 in severe Canadian subzero outdoor conditions. This rustproof, tamperproof, weatherproof has all-aluminium construction and mineral fiber insulation and does not need a heater (nor a blower) to keep the camera in good working order. Lightweight, even if it's double-walled, this sealed housing already comes pre-wired with coaxial video and VAC cables. The front cover opens and extends horizontally for total camera access. It features a 3/16" polycarbonate window. It can be installed on anywhere with the appropriate mounting bracket; FSM-2012 for wall, FSP-2012 for ceiling, FSC-2012 for corner and FSA-2012 for pole.

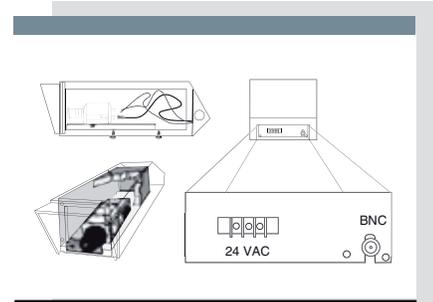


DIMENSIONS EXTERNES		
WIDTH	HEIGHT	DEPTH
7.00"/178mm	7.00"/178mm	18.75"/476mm

FB-2012-IP

A proven, insulated hermetically sealed housing

This design has been tested since 1987 in severe Canadian subzero outdoor conditions. This rustproof, tamperproof, weatherproof has all-aluminium construction and mineral fiber insulation and does not need a heater (nor a blower) to keep the camera in good working order. Lightweight, even if it's double-walled, this sealed housing includes a liquid-tight connector to run the cable. The front cover opens and extends horizontally for total camera access. It features a 3/16" polycarbonate window. It can be installed on anywhere with the appropriate mounting bracket; FSM-2012 for wall, FSP-2012 for ceiling, FSC-2012 for corner and FSA-2012 for pole.

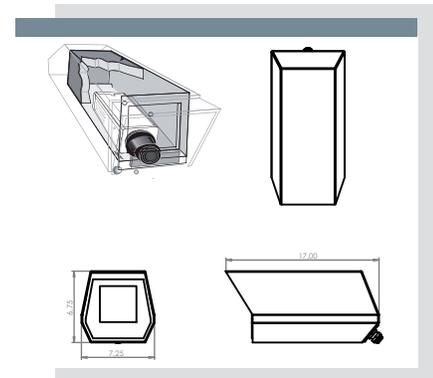

DIMENSIONS EXTERNES		
WIDTH	HEIGHT	DEPTH
7.25"/184mm	6.75"/171mm	17.00"/432mm

OUTDOOR ENCLOSURES


FB-2012SS



Heavy-duty stainless steel weatherproof and dustproof enclosure

Once again Batko innovates with the FB-2012SS housing. This insulated housing can withstand extreme environmental conditions such as; high and low temperatures, salted air/marine, corrosive, dust, etc. The FB-2012SS is designed to fit most applications. It is built in 316 grade stainless steel and features a double-walled construction to last several years in the worst conditions.

EXTERNAL DIMENSIONS		
WIDTH	HEIGHT	DEPTH
7.25"/184mm	10.75"/273mm	10.40"/264mm

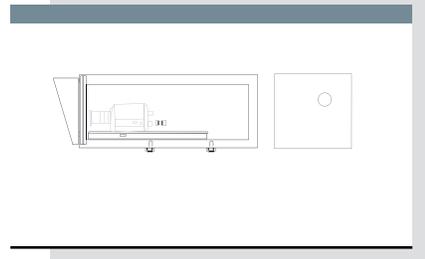


FBA-2012



The solution for harsh environmental applications

The FBA-2012 is an air-cooled enclosure designed for camera and lens protection in hot temperature applications. The double-walled 1" thick air chamber lets the air flow within the enclosure walls to cool down the electronics. The FBA-2012 has a neoceram window capable of sustaining temperatures up to 300°F (148°C). The enclosure has 3/8"npt air inlet, to which a 35 PSI (30 CFM) maximum regulated pressure can be applied. The air exits through an exhaust valve. A sealed cable connector is provided for the coaxial and power cable at the rear of the enclosure.

EXTERNAL DIMENSIONS		
WIDTH	HEIGHT	DEPTH
7.00"/178mm	7.00"/178mm	16.00"/406mm

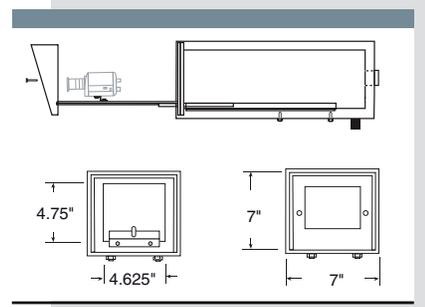

HIGH SECURITY ENCLOSURES


FB-13P1HS



Corner housing for high security applications

Even if this high security housing is made of heavy duty aluminium plate, it remains lightweight. Its tamperproof cover is fully removable for total camera access. The camera bracket angle is easily adjustable from 0° to 45°. Requiring 4 screws, installation is fast and easy on any surface. When a wide angle lens is used and the camera bracket is adjusted to 45°, surveillance is possible underneath the enclosure. Also available with a tempered glass window, specially designed for detention centers (FB-13P1DET).

EXTERNAL DIMENSIONS		
WIDTH	HEIGHT	DEPTH
6.75"/171mm	11.625"/295mm	10.625"/270mm

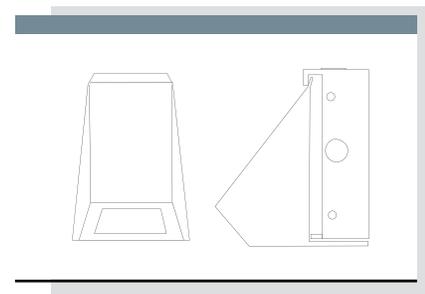


FB-1410HS



High security housing with practical innovations

Even if this high security housing is made of heavy duty aluminium plate, it remains lightweight and is the perfect choice above a doorway. Its tamperproof cover is fully removable for total camera access. The camera bracket angle is easily adjustable from 0° to 45°. Requiring 4 screws, installation is fast and easy on any surface. Underneath surveillance is possible with a wide angle lens. Also available with a tempered glass window, specially designed for detention centers (FB-1410DET).

EXTERNAL DIMENSIONS		
WIDTH	HEIGHT	DEPTH
7.25"/184mm	10.75"/273mm	10.40"/264mm

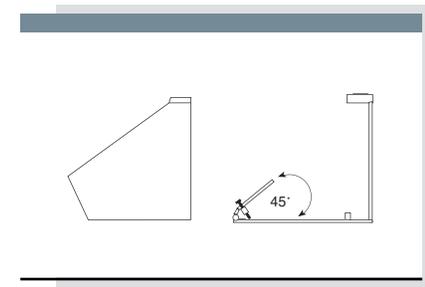

INDOOR LOCK BOXES


FR-1611

Protection in vehicle applications

This compact and robust aluminium lock box only weighs 6.5 lbs and is designed to fit in tight areas. Fully vented to dissipate internal heat, this cabinet does not require a cooling fan in most situations. The front door is locked and opens 180° for your convenience. The rear panel is removable and also gives full access to the back of the VCR for service and installation. Also available with blower (FRE-1611)



EXTERNAL DIMENSIONS		
WIDTH	HEIGHT	DEPTH
12.25"/311mm	5.75"/146mm	16.25"/413mm
MAXIMUM DIMENSIONS OF EQUIPMENT		
WIDTH	HEIGHT	DEPTH
11.25"/286mm	5.25"/133mm	15.50"/394mm

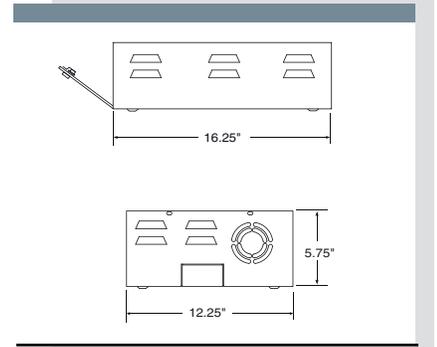


FR-1816

Mid-size lock box

This tamperproof, lightweight, all aluminium VCR box has a key locked, hinged front door and removable rear panel for easy installation and service. The compact size of this lock box, only 17" wide, allows it to be mounted in a 19" standard rack using optional mounting brackets. With vented side panels, in most cases there is no blower required. Also available with a cooling fan and power bar (FRE-1611).



EXTERNAL DIMENSIONS		
WIDTH	HEIGHT	DEPTH
17.00"/432mm	7.00"/178mm	18.25"/464mm
MAXIMUM DIMENSIONS OF EQUIPMENT		
WIDTH	HEIGHT	DEPTH
16.50"/419mm	6.50"/165mm	17.50"/445mm

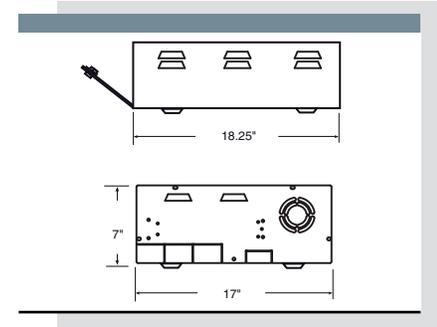


FR-1819

Standard lock box

This lightweight, tamperproof all aluminium VCR box has a key locked, hinged front door and a removable rear panel for easy installation and service. This lock box can accommodate most popular VCR and multiplexer combinations (max height 6"). With vented side panels, in most cases there is no blower required. Also available with a cooling fan and power bar (FRE-1819).



EXTERNAL DIMENSIONS		
WIDTH	HEIGHT	DEPTH
20.00"/508mm	7.00"/178mm	18.25"/464mm
MAXIMUM DIMENSIONS OF EQUIPMENT		
WIDTH	HEIGHT	DEPTH
18.75"/476mm	6.00"/152mm	17.50"/445mm

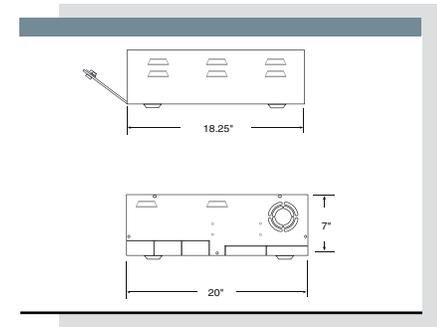

INDOOR LOCK BOXES


FR-DVR6U

Table top or wall mount enclosure with 19" rack-mount rails

This all aluminium 12 gauge enclosure box provides a good protection for most servers & digital video recorders. Behind its locked door, systems can be secured to a set of standard 19" rails. A maximum of 6 spaces (6U) or 10.5" is available in height. Most DVRs are 4U in height, which means two extra spaces are available for accessories. Six #10-32 screws are provided to fix devices to rails. The removable rear panel facilitates installation. Cable entry knockouts are also provided at the back of the cabinet. Also available with cooling fan and power bar (FRE-DVR6U).



EXTERNAL DIMENSIONS		
WIDTH	HEIGHT	DEPTH
20.50"/521mm	11.50"/292mm	23.75"/603mm
MAXIMUM DIMENSIONS OF EQUIPMENT		
WIDTH	HEIGHT	DEPTH
19.20"/488mm	10.50"/267mm	22.75"/578mm

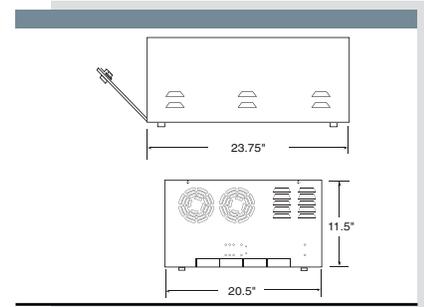


FR-DVR10U

Table top or wall mount enclosure with 19" rack-mount rails

This all aluminium 12 gauge enclosure box provides a good protection for most servers & digital video recorders. Behind its locked door, systems can be secured to a set of standard 19" rails. A maximum of 10 spaces (10U) or 17.5" is available in height. Six #10-32 screws are provided to fix devices to rails. The removable rear panel facilitates installation. Cable entry knockouts are also provided at the back of the cabinet. Also available with cooling fan and power bar (FRE-DVR10U).



EXTERNAL DIMENSIONS		
WIDTH	HEIGHT	DEPTH
20.50"/521mm	18.00"/457mm	26.00"/660mm
MAXIMUM DIMENSIONS OF EQUIPMENT		
WIDTH	HEIGHT	DEPTH
19.20"/488mm	17.50"/445mm	24.00"/610mm

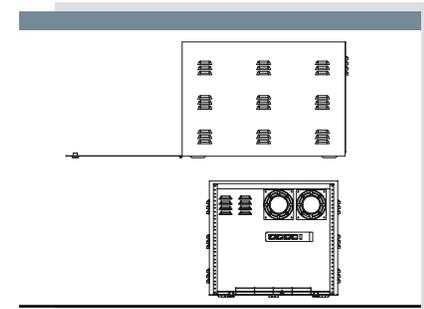

OUTDOOR LOCK BOXES


FRI-140813



Unique design for extreme applications

The FRI-140813 is built for outdoor applications. The insulated enclosure is made of lightweight aluminium and the front door is sealed and locked with a key. Ventilation louvers with filters are provided on each side and are designed to prevent water and insect infiltrations. Options are available; add the blower if external temperature could be higher than 80°F. Add the heater option if external temperatures could go below 14°F. Wall-mounts (FSM-140813) and pole-mounts (FSA-140813) are available. Four knockouts are provided for cable entry.

EXTERNAL DIMENSIONS		
WIDTH	HEIGHT	DEPTH
16.75"/425mm	12.125"/308mm	18.75"/476mm
MAXIMUM DIMENSIONS OF EQUIPMENT		
WIDTH	HEIGHT	DEPTH
14.00"/356mm	8.00"/203mm	12.00"/305mm

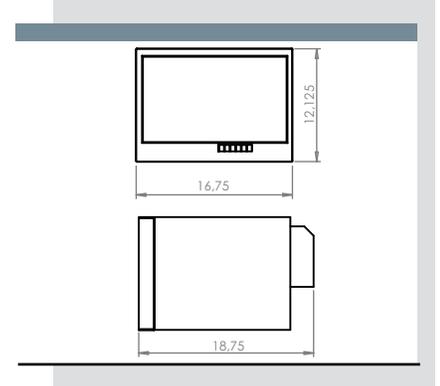


FRI-191022

Weatherproof rack-mount (6U) enclosure for outdoor use

The FRI-191022 is built for outdoor applications. The insulated enclosure is made of lightweight aluminium and the front door is sealed and locked with a key. Ventilation louvers with filters are provided on each side and are designed to prevent water and insect infiltrations. It features standard 19" rails with six spaces available (6U). Six #10-32 screws are provided to fix rack-mount devices. Options are available; add the blower if external temperature could be higher than 80°F. Add the heater option if external temperatures could go below 14°F. Wall-mounts (FSM-191022) and pole-mounts (FSA-191022) are available. Four knockouts are provided for cable entry.

EXTERNAL DIMENSIONS		
WIDTH	HEIGHT	DEPTH
21.00"/533mm	12.00"/305mm	24.00"/610mm
MAXIMUM DIMENSIONS OF EQUIPMENT		
WIDTH	HEIGHT	DEPTH
19.00"/483mm	10.00"/254mm	22.25"/565mm

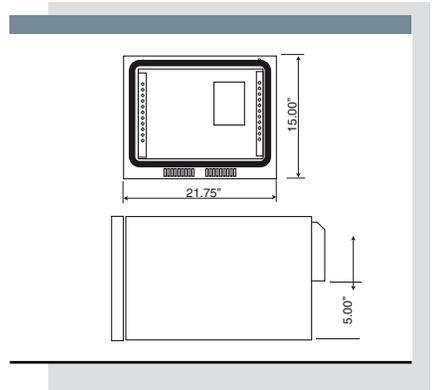


FRI-191822

Weatherproof rack-mount (10U) enclosure for outdoor use

The FRI-191822 is built for outdoor applications. The insulated enclosure is made of lightweight aluminium and the front door is sealed and locked with a key. Ventilation louvers with filters are provided on each side and are designed to prevent water and insect infiltrations. It features standard 19" rails with ten spaces available (10U). Six #10-32 screws are provided to fix rack-mount devices. Options are available; add the blower if external temperature could be higher than 80°F. Add the heater option if external temperatures could go below 14°F. Wall-mounts (FSM-191822) and pole-mounts (FSA-191822) are available. Four knockouts are provided for cable entry.

EXTERNAL DIMENSIONS		
WIDTH	HEIGHT	DEPTH
23.125"/587mm	22.00"/559mm	25.00"/635mm
MAXIMUM DIMENSIONS OF EQUIPMENT		
WIDTH	HEIGHT	DEPTH
19.00"/483mm	19.25"/489mm	23.00"/584mm

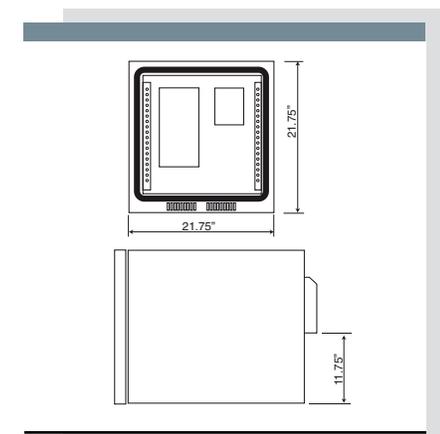


SINGLE POLE MOUNTS


FRP series




The FRP series of freestanding gooseneck pedestal mounts allow card readers or intercom stations to be mounted in applications such as garage or gate access. A wide selection of pedestals is available to suit drive-up or walk-up applications. They feature an all-aluminium construction and white polyurethane coating, and are therefore rustproof. Custom colours are available upon request.

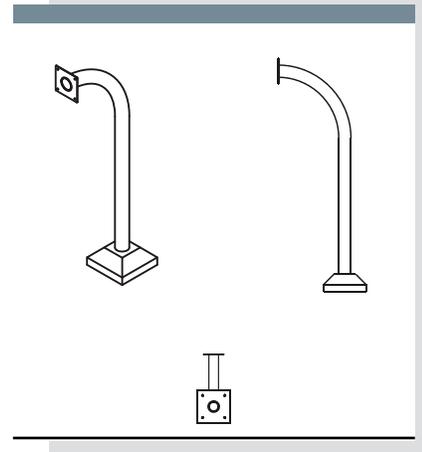


FRP-43



FRP-48




FRP-60



FRP-72



FRP-84



FRP-96



SELECTION CHART


BATKO MODELS	EXTERNAL DIMENSIONS		
	WIDTH	HEIGHT	DEPTH
FRP-43	8.25"	45.50"	17.125"
FRP-48	8.25"	50.50"	17.125"
FRP-60	8.25"	62.50"	17.125"
FRP-72	8.25"	74.50"	17.125"
FRP-84	8.25"	86.50"	17.125"
FRP-96	8.25"	98.50"	17.125"

DOUBLE POLE MOUNTS


FRP series




The FRP series of freestanding gooseneck pedestal mounts allow card readers or intercom stations to be mounted in applications such as garage or gate access. A wide selection of pedestals is available to suit drive-up or walk-up applications. They feature an all-aluminium construction and white polyurethane coating, and are therefore rustproof. Custom colours are available upon request.

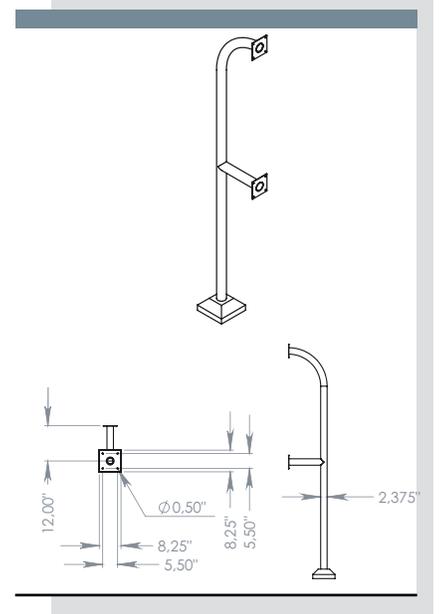


FRP-8443




FRP-9643



FRP-70D

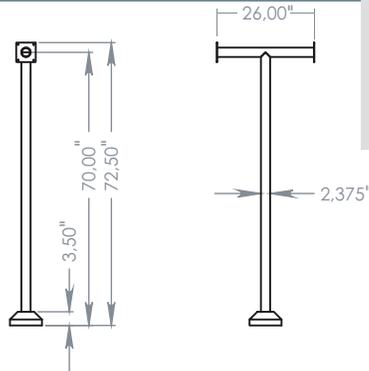

FRP-H-11

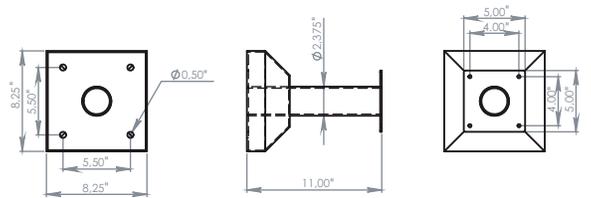

SELECTION CHART

BATKO MODEL	EXTERNAL DIMENSIONS		
	WIDTH	HEIGHT	DEPTH
FRP-8443	8.25"	86.50"	17.125"
FRP-9643	8.25"	98.50"	17.125"
FRP-70D	8.25"	72.50"	17.125"

SELECTION CHART

BATKO MODEL	EXTERNAL DIMENSIONS		
	WIDTH	HEIGHT	DEPTH
FRP-H-11 (Wall Mount)	8.25"	8.25"	11.00"

HOOD HOUSING



FRH series


The FRH series of hood housings provide mounting surface and protection for card readers, intercom stations and other access devices. The aluminium construction along with a polycarbonate surface are weatherproof and protect components from direct sunlight, rain and snow. They can be used as a standalone wall-mounted housing or in combination with the FRP series pedestals.




FRH-HDPE series

The FRH-HDPE series of hood housings provide mounting surface and protection for long range card readers, intercom stations and other access devices. The high density polyethylene and polycarbonate construction does not interfere with card readers and protect components from direct sunlight, rain and snow. They can be used as a standalone wall-mounted housing or in combination with the FRP series pedestals.


FRH-0808

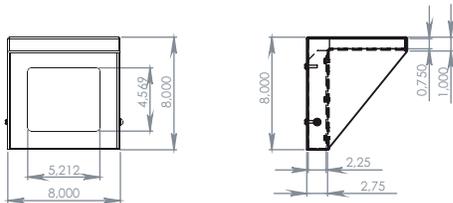


FRH-1015

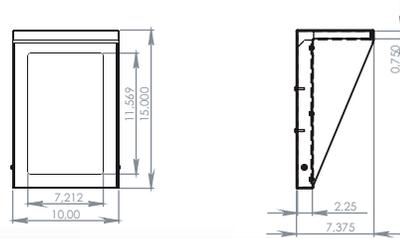


FRH-1317

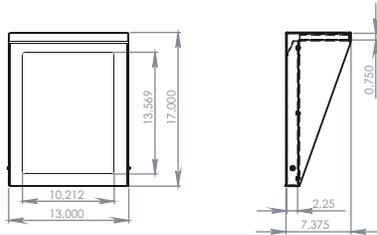


FRH-2316

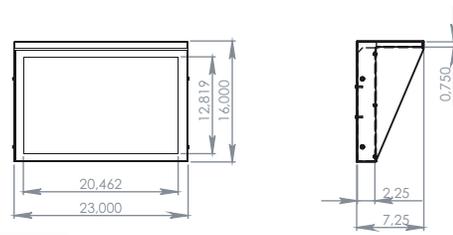

FRH-1317HDPE



FRH-2316HDPE

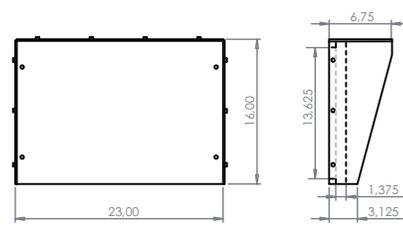

SELECTION CHART

BATKO MODEL	EXTERNAL DIMENSIONS		
	WIDTH	HEIGHT	DEPTH
FRH-0808	8.00"	8.00"	7.25"
FRH-1015	10.00"	15.00"	7.375"
FRH-1317	13.00"	17.00"	7.375"
FRH-2316	23.00"	16.00"	7.25"
FRH-1317HDPE	13.00"	17.00"	6.75"
FRH-2316HDPE	23.00"	16.00"	6.75"

COMPUTER ENCLOSURES


FR-051520



Protection for computers

This enclosure has a door with 2 locks. A computer can safely be installed inside the box. The aluminium construction provides protection against theft and vandalism. It fits most popular computers and there is enough space inside for cable connections. The cabinet is vented to prevent heating. Can be secured to a desk or wall.

EXTERNAL DIMENSIONS		
WIDTH	HEIGHT	DEPTH
6.25"/159mm	16.625"/422mm	20.50"/521mm
INTERNAL DIMENSIONS		
WIDTH	HEIGHT	DEPTH
5.375"/137mm	15.375"/391mm	20.00"/508mm

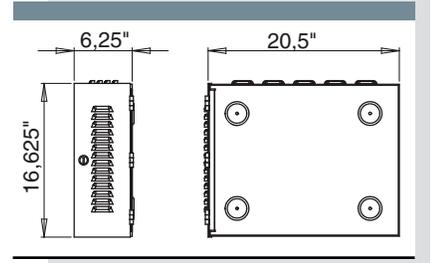


FR-CPU-H01



Low cost protection for computers

This horizontal design computer lock box is truly efficient to secure most computers. The aluminium construction provides protection against theft and vandalism. It can be fixed to a desk or other surfaces. The open face of the cabinet provides access to on/off operations and disk drive. Two tamperproof security plates that can be moved left or right across the front and back offer protection against theft.

EXTERNAL DIMENSIONS		
WIDTH	HEIGHT	DEPTH
20.30"/516mm	7.50"/191mm	19.25"/489mm
INTERNAL DIMENSIONS		
WIDTH	HEIGHT	DEPTH
19.00"/483mm	6.00"/152mm	18.60"/472mm

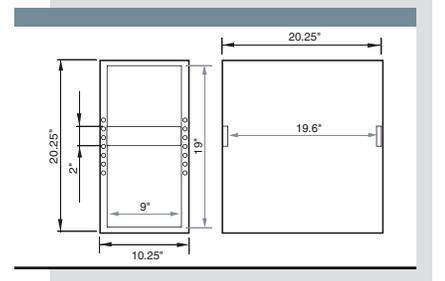


FR-CPU-V01



Low cost protection for computers

This vertical design computer lock box is truly efficient to secure most computers. The aluminium construction provides protection against theft and vandalism. It can be fixed to a desk or other surfaces. The open face of the cabinet provides access to on/off operations and disk drive. The two tamperproof security plates can be moved up and down for convenience and offer protection against theft.

EXTERNAL DIMENSIONS		
WIDTH	HEIGHT	DEPTH
10.25"/260mm	20.25"/514mm	20.25"/514mm
INTERNAL DIMENSIONS		
WIDTH	HEIGHT	DEPTH
9.00"/229mm	19.00"/483mm	19.60"/498mm

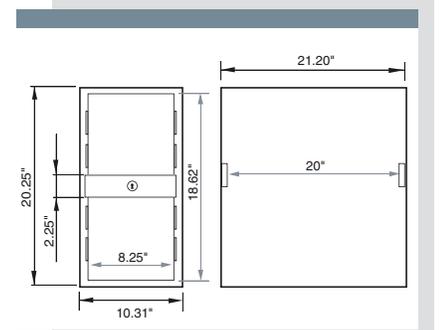

COMPUTER ENCLOSURES




FR-CPU01

Versatile protection for computers

This enclosure fits bigger computers. It has a door with 2 locks. A computer can safely be installed inside the box. The aluminium construction provides protection against theft and vandalism. Knockouts are available for cable entry and there is enough space inside for cable connections. The cabinet is vented to prevent heating. Can be secured to a desk or wall.

EXTERNAL DIMENSIONS		
WIDTH	HEIGHT	DEPTH
12.00"/305mm	27.10"/688mm	23.50"/597mm
INTERNAL DIMENSIONS		
WIDTH	HEIGHT	DEPTH
9.125"/232mm	24.25"/616mm	22.00"/559mm

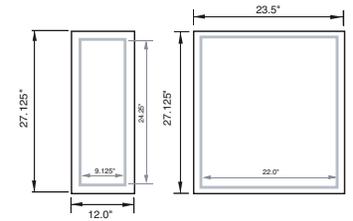


FR-TLR01

Versatile protection for computers with keyboard tray

This enclosure fits bigger computers. It has a door with 2 locks. A computer can safely be installed inside the box. The aluminium construction provides protection against theft and vandalism. Knockouts are available for cable entry and there is enough space inside for cable connections. A sliding tray bolted on top provides storage and space to operate a keyboard. The top of the enclosure serves as a monitor shelf. The cabinet is vented to prevent heating. Can be secured to a desk or wall.

EXTERNAL DIMENSIONS		
WIDTH	HEIGHT	DEPTH
18.10"/460mm	32.25"/819mm	23.50"/597mm
INTERNAL DIMENSIONS		
WIDTH	HEIGHT	DEPTH
9.10"/231mm	24.30"/617mm	22.00"/559mm

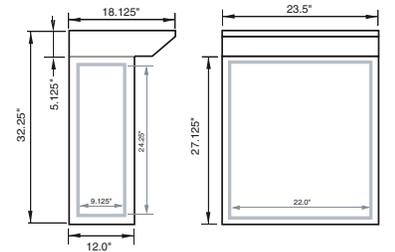


FR-CPU01-SB

Industrial dustproof cabinet for computers and DVRs

Designed to prevent dust infiltration, this cabinet can safely secure high value electronic components in industrial applications. Two continuous duty 4" blowers allow good air circulation throughout the cabinet. Small dust particles are stopped by the filter. The cabinet can be anchored to the floor for maximum protection. The special lock ensures perfect door seal. Once the rear panel is removed, cable connections can be easily made and the rear filter cleaned. Maintenance: Clean dust filters weekly.

EXTERNAL DIMENSIONS		
WIDTH	HEIGHT	DEPTH
12.00"/305mm	27.00"/686mm	24.00"/610mm
INTERNAL DIMENSIONS		
WIDTH	HEIGHT	DEPTH
9.50"/241mm	24.25"/616mm	20.80"/521mm

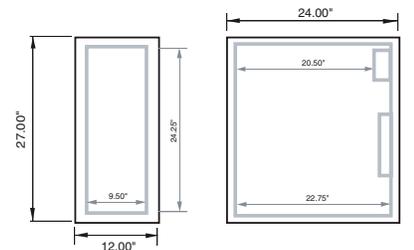


COMPUTER ENCLOSURES

FR-TLR01-SB

Industrial dustproof cabinet for computer with keyboard tray

Designed to prevent dust infiltration, this cabinet can safely secure high value electronic components in industrial applications. Two continuous duty 4" blowers allow good air circulation throughout the cabinet. Small dust particles are stopped by the filter. The cabinet can be anchored to the floor for maximum protection. The special lock ensures perfect door seal. A sliding tray bolted on top provides storage and space to operate a keyboard. The top of the enclosure serves as a monitor shelf. Once the rear panel is removed, cable connections can be easily made and the rear filter cleaned. Maintenance: Clean dust filters weekly.

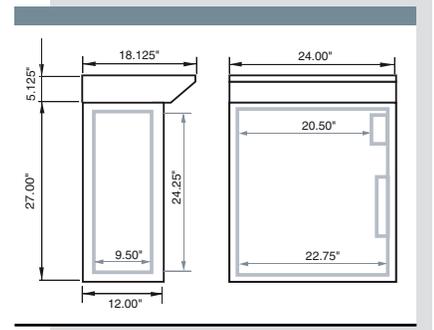


EXTERNAL DIMENSIONS		
WIDTH	HEIGHT	DEPTH
24.00"/610mm	32.125"/816mm	18.125"/460mm
INTERNAL DIMENSIONS		
WIDTH	HEIGHT	DEPTH
20.50"/521mm	24.25"/616mm	9.50"/241mm

SUPPORT FOR COMPUTERS


FRM-CPU-01

Vertical Support for Desktop Computer

This product frees up work space or floor by enabling to place the computer against the desk, a few inches from the floor. Attaching this support to a wall or a desk helps maintaining a clean work environment. This support can accommodate any table desktop with a maximum height of 4"



EXTERNAL DIMENSIONS		
WIDTH	HEIGHT	DEPTH
4.625"/117mm	8.00"/203mm	15.875"/403mm

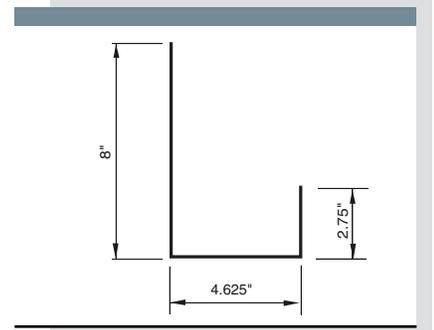

CASH SAFETY ENCLOSURE


FR-TLR01-SB

Cash register drawers safety enclosure

The FR-TC series of anti-theft cases for cash drawers allow secure storage of unused drawers. Using different keys on all the spaces, only the user of the cash drawer or administrator can access contents. Being custom-made, endless configurations are possible to meet your needs. Send us your requests and we will provide a solution!



EXTERNAL DIMENSIONS		
WIDTH	HEIGHT	DEPTH
17.50"/445mm	22.625"/575mm	16.00"/406mm

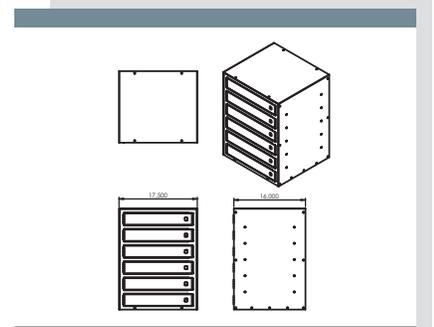


MONITOR ENCLOSURES

FR-LCD



The FR-LCD series of indoor enclosures provides protection against theft, vandalism, dust and restrain access to buttons and devices. Protection is assured by an aluminium construction and abrasion resistant polycarbonate window. The whole series is vented and equipped with a fan to ensure proper air circulation. Easy to install, there is no need for additional hardware. The included monitor bracket is built to your monitor's specs. We have a complete line of display mounts but the enclosure can be installed flush to a wall or to any standard VESA display.

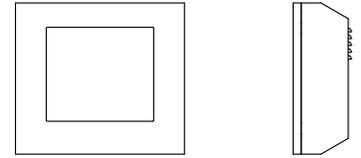

LCD INDOOR ENCLOSURES


LANDSCAPE ORIENTATION	PORTRAIT ORIENTATION	DESCRIPTION
FR-LCD-17	FR-LCD-P17	Dustproof security enclosure for 15"/17" monitor , VESA
FR-LCD-20	FR-LCD-P20	Dustproof security enclosure for 19"/21" monitor , VESA
FR-LCD-24	FR-LCD-P24	Dustproof security enclosure for 22"/24" monitor , VESA
FR-LCD-32	FR-LCD-P32	Dustproof security enclosure for 32" monitor , VESA

* Ask for more details on our "FR-LCD & FRI-LCD" mounts selection.

FRI-LCD



The FRI-LCD series of outdoor enclosures provides protection against theft, vandalism and extreme weather. The unique insulated aluminium construction allows monitor operation in temperatures ranging from -40°C/-40°F to 40°C/104°F on models equipped with a heater. The abrasion resistant polycarbonate window keeps the screen safe. Vents and two thermostatic blowers keep the enclosure condensation free. Easy to install, there is no need for additional hardware. The included monitor bracket is built to your monitor's specs. We have a complete line of display mounts but the enclosure can be installed to any standard VESA display.

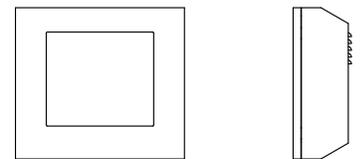

LCD OUTDOOR INSULATED ENCLOSURE


LANDSCAPE ORIENTATION	PORTRAIT ORIENTATION	DESCRIPTION
FRI-LCD-17	FRI-LCD-P17	Environmental enclosure with fan for 15"/17" monitor , VESA
FRI-LCD-17(H)	FRI-LCD-P17(H)	Environmental enclosure with fan/heater for 15"/17" monitor , VESA
FRI-LCD-20	FRI-LCD-P20	Environmental enclosure with fan for 19"/21" monitor , VESA
FRI-LCD-20(H)	FRI-LCD-P20(H)	Environmental enclosure with fan/heater for 19"/21" monitor , VESA
FRI-LCD-24	FRI-LCD-P24	Environmental enclosure with fan for 22"/24" monitor , VESA
FRI-LCD-24(H)	FRI-LCD-P24(H)	Environmental enclosure with fan/heater for 22"/24" monitor , VESA
FRI-LCD-32	FRI-LCD-P32	Environmental enclosure with fans for 32" monitor , VESA
FRI-LCD-32(H)	FRI-LCD-P32(H)	Environmental enclosure with fan/heater for 32" monitor , VESA

MONITOR ENCLOSURES

FRC-LCD



The FRC-LCD series of indoor enclosures provides protection against theft, vandalism and restrain access to buttons and devices. Protection is assured by an aluminium construction and abrasion resistant polycarbonate window. The whole series is vented and equipped with a fan to ensure proper air circulation. Easy to install; there is no need for additional hardware. The included monitor bracket is built to your monitor's specs. We have a complete line of display mounts but the enclosure can be installed flush to a wall or to any standard VESA display.




LCD INDOOR ENCLOSURE

LANDSCAPE ORIENTATION	PORTRAIT ORIENTATION	DESCRIPTION
FRC-LCD-15	FRC-LCD-P15	Cover for 15" monitor, VESA
FRC-LCD-17	FRC-LCD-P17	Cover for 17" monitor, VESA
FRC-LCD-20	FRC-LCD-P20	Cover for 20" monitor, VESA
FRC-LCD-24	FRC-LCD-P24	Cover for 24" monitor, VESA
FRC-LCD-32	FRC-LCD-P32	Cover for 32" monitor, VESA

FR-ENCO



The FRC-LCD series of indoor enclosures provides protection against theft, vandalism and restrain access to buttons and devices. Protection is assured by an aluminium construction and abrasion resistant polycarbonate window. The whole series is vented and equipped with a fan to ensure proper air circulation. Easy to install; there is no need for additional hardware. The included monitor bracket is built to your monitor's specs. We have a complete line of display mounts but the enclosure can be installed flush to a wall or to any standard VESA display.



ENCOVER SERIES LCD INDOOR ENCLOSURE

LANDSCAPE ORIENTATION	PORTRAIT ORIENTATION	DESCRIPTION
FR-ENCO-15	FR-ENCO-P15	Encover for 15" monitor, VESA
FR-ENCO-17	FR-ENCO-P17	Encover for 17" monitor, VESA
FR-ENCO-20	FR-ENCO-P20	Encover for 20" monitor, VESA
FR-ENCO-24	FR-ENCO-P24	Encover for 24" monitor, VESA
FR-ENCO-32	FR-ENCO-P32	Encover for 32" monitor, VESA

ACCESSORY MOUNTS




FSA2012

Pole adapter for most 3" to 8" poles

This one lightweight one piece aluminium construction provides a strong and stable mounting surface for the FSM-2012 and FSM-3009 wall brackets. It can be used on poles of 3" to 8" diameter. Two stainless steel collars are included.

EXTERNAL DIMENSIONS	
WIDTH	HEIGHT
5.40"/137mm	10.00"/254mm




FSM2012

Adjustable wall mount for FB-2008 and FB-2012 series

Lightweight and rustproof this all-aluminium bracket is solid and fully adjustable in all directions. The bracket can tilt 55° and swivel 360°. Installation is facts and easy requiring only 4 screws.

EXTERNAL DIMENSIONS	
WIDTH	HEIGHT
5.40"/137mm	10.00"/254mm



CAMERA MOUNTS




FSMP3610-125/150

Universal wall-mount parapet available with 1.25" and 1.5" NPT pipe

This parapet is ideal for elevated surveillance. The mount can be adjusted 360°. It is made of very rigid and lightweight aluminium. It can be solidly installed to a wall using 6 bolts.

EXTERNAL DIMENSIONS		
WIDTH	HEIGHT	DEPTH
26.50"/673mm	37.75"/959mm	5.75"/146mm




FSRP3610-125/150

Universal pedestal parapet available with 1.25" and 1.5" NPT pipe

This parapet is ideal for elevated surveillance. The mount can be adjusted 360°. It is made of very rigid and lightweight aluminium. IT can be solidly installed to any flat surface (roof, etc.) using 22 screws.

EXTERNAL DIMENSIONS		
WIDTH	HEIGHT	DEPTH
13.00"/330mm	37.95"/964mm	33.72"/856mm




FSCP3610-125/150

Universal corner-mount parapet available with 1.25" and 1.5" NPT pipe

This parapet is ideal for elevated surveillance. The mount can be adjusted 360°. It is made of very rigid and lightweight aluminium. It can be solidly installed into a corner using 12 screws.

EXTERNAL DIMENSIONS		
WIDTH	HEIGHT	DEPTH
20.22"/514mm	37.82"/961mm	36.95"/939mm



CAMERA MOUNTS




FSM-CAM-02

8" Universal wall mount for most dome cameras

This wall mount is entirely made of aluminium, lightweight and rustproof. Easy to install with 4 screws. Its design makes it easy to run cables.

EXTERNAL DIMENSIONS		
WIDTH	HEIGHT	DEPTH
6.50"/165mm	3.50"/89mm	6.875"/175mm

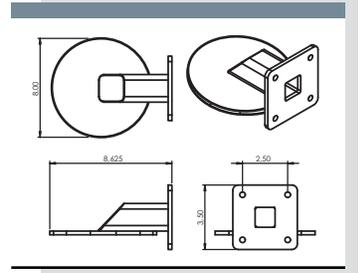


FSM-CAM-01

6.5" Universal wall mount for most dome cameras

This wall mount is entirely made of aluminium, lightweight and rustproof. Easy to install with 4 screws. Its design makes it easy to run cables.

EXTERNAL DIMENSIONS		
WIDTH	HEIGHT	DEPTH
6.50"/165mm	3.50"/89mm	6.875"/175mm

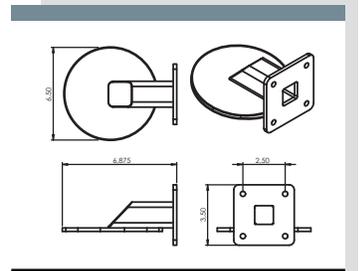


FSM-B245

Wall mount for Bosch Advantage series

This wall mount is entirely made of aluminium, lightweight and rustproof. Easy to install with 4 screws. Its design makes it easy to run cables.

Pole adapter (FSA-B245) available.

EXTERNAL DIMENSIONS		
WIDTH	HEIGHT	DEPTH
5.4375"/138mm	3.50"/89mm	6.625"/168mm

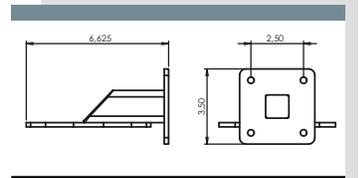

HEIGHT STRIP HOUSING



FB-AXP1204


Housing with height strip for Axis P1204 pinhole camera

The swivel camera mount enables angle adjustment. Made to be installed next to a door frame, the FB-AXP1204 keeps the camera concealed and protected while having a perfect shot at people's face. Features an all-aluminium construction and multiple camera mounting spaces.

FSS-AXP1204-01: 180° horizontal adjustable pivoting wall mount for FB-AXP1204

FS-AXP1204-15: 15° horizontal fixed tilt wall mount for FB-AXP1204

EXTERNAL DIMENSIONS		
WIDTH	HEIGHT	DEPTH
1.875"/48mm	27.75"/705mm	1.00"/25mm

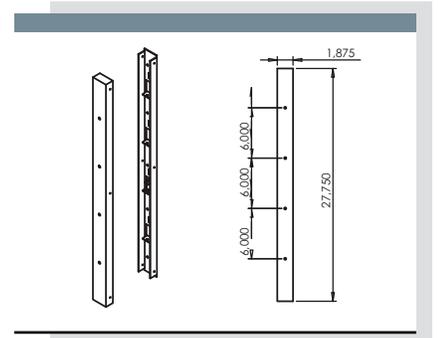


TABLET ENCLOSURES

FR-TABLET series



This lightweight tamperproof all aluminum tablet enclosure has a hinged front door for easy installation and service. It comes with an anti-theft screw for more protection. VESA MIS-D 75mm x 75mm / MIS-D 100mm x 100mm mount

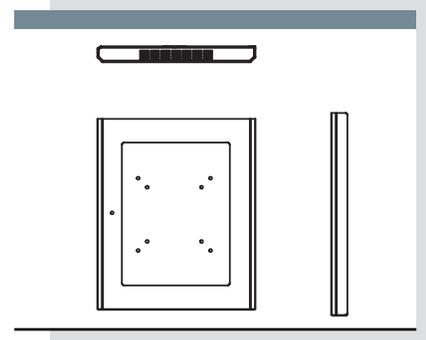


TABLET ENCLOSURES MOUNTS

FS-TABLET-01



FS-TABLET-01 was design to fit our protective tablet enclosure selection. Adding the optional tablet/ wall mount allows for quick and easy installation of your tablet and enclosure for public use.

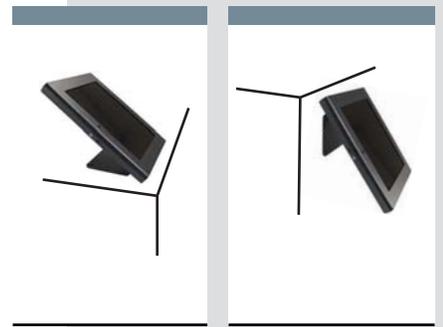

FRP-STM-01



FRP-STM-01 was design to fit our protective tablet enclosure selective. Adding the optional floor stand allows for quick and easy installation of your tablet and enclosure for public use. Cables and power supply are conveniently stored in the floor stand.





BATKO has been manufacturing protective enclosures since 1982. We are experts in designing and building custom housings for all your needs. Our in-house team will be pleased to gather your ideas and submit a simple and efficient solution to your demand. Our personal approach ensures that nothing is laid aside. We are brand neutral, meaning we can work with any product. Everything is made with pride in our factory with quick production lead times. Our vast experience in protecting electronics of all kinds is a testament of quality, ranging from security cameras, DVRs and monitors to virtually anything. Whether you need to protect your equipment from extreme weather, vandalism or simply need a streamlined way to restrain access to controls, our expertise will meet your requirements.